

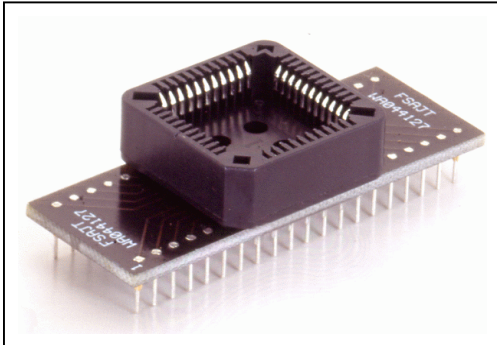


WAXx127FSAJT PLCC TO DIL ADAPTER

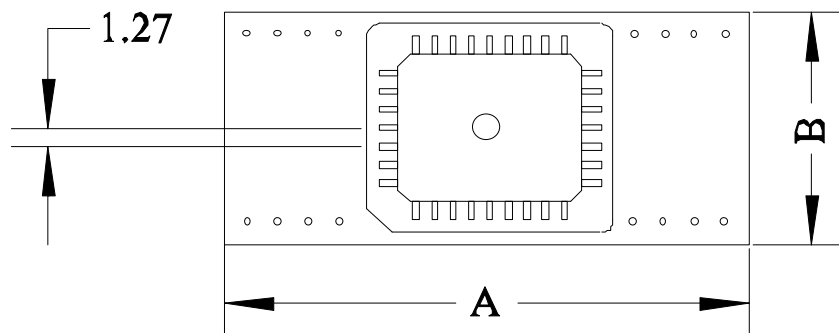

This is a complete range of Adapters which covers a PLCC package to either an PGA or DIL footprint.

The adapters can be supplied with or without PLCC production sockets.

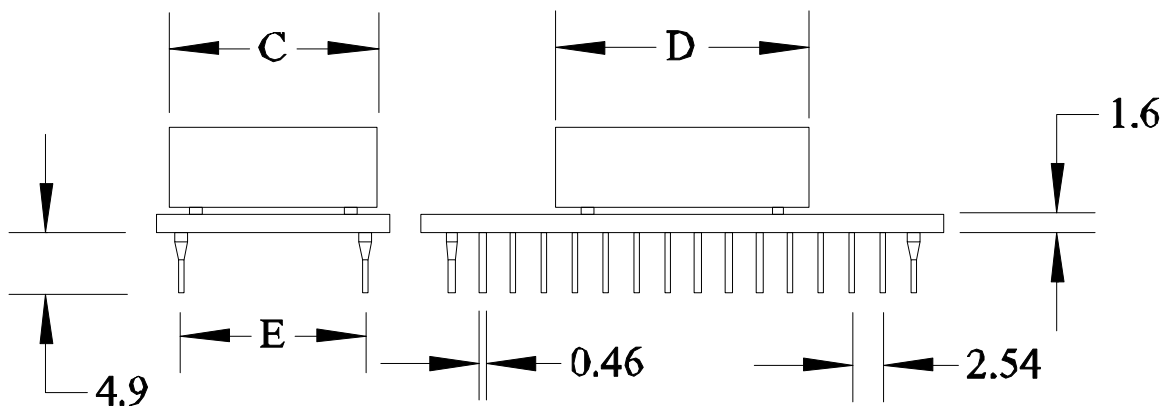

WINSLOW ADAPTICs

WAx127FSAJT PLCC TO DIL ADAPTER

Adapter Dimension Table - PLCC Socket to DIP

Part Number	Device	PLCC Pins	DIP Pins	Pitch	A	B	C	D	E
WA020127FSAJT	GENERIC	20	20	1.27	27.94	20.32	15.50	15.50	15.24
WA028127FSAJT	GENERIC	28	28	1.27	35.56	20.32	18.30	18.30	15.24
WA032127FSAJT	GENERIC	32	32	1.27	40.64	20.32	21.63	18.75	15.24
W2603	1, 12, 17, 26 NC	32	28	1.27	35.56	20.32	21.63	18.75	15.24
WA044127FSAJT	1, 12, 23, 34 NC	44	40	1.27	50.80	20.32	23.50	23.50	15.24
WA044127FSAJT-2	2, 22, 27, 40 NC	44	40	1.27	50.80	20.32	23.50	23.50	15.24
W2443	GENERIC	44	44	1.27	50.80	20.32	23.50	23.50	15.24
WA052127FSAJT	GENERIC	52	52	1.27	66.04	25.40	25.90	25.90	15.24
WA068127FSAJT	GENERIC	68	68	1.27	83.36	30.48	32.00	32.00	15.24
WA084127FSAJT	GENERIC	84	84	1.27	106.68	35.56	37.00	37.00	15.24



Solutions to Component Leadtime and Obsolescence

Also available from Winslow Adaptics are cost effective, time saving solutions to test, obsolescence, supply problems and upgrades. OEMs can upgrade equipment with custom Adaptics utilising additional logic, often saving considerable cost and time on re-design. If lead-time becomes an issue contact us for a suitable package converter. We specialise in conversion of all package lead-frames. For further information please contact your nearest sales office

sales@winslowadaptics.com

www.winslowadaptics.com